

Children's Flooring

- PVC foam backing, excellent anti-slip and shock absorption, which ensure the securities of childrens'
- Cartoon designs and patterns which are liked by children more
- UV coating, no need for initial polishing
- Optional with sanitized treatment, good antibacterial function
- Excellent stain resistance and easy cleaning
- Good sound insulation and soft step feeling

Specification			
Thickness	2.6mm/0.35mm wear layer		
Size Available	2m x 15m		
Item	Test method	Unit	Result
Finish			UV
Slip resistance (oil-wet ramp test)	DIN 51130:2014-02		R9
Wear resistance	EN 660-2:1999		Group P
European classification	EN 649	class	34-43
Fire resistance	EN 13501-1:2007+A1:2009(E)		Bfl-S1
Dimensional stability	ISO 23999:2008	%	≤ 0.4
Electrical resistance	SJ/T11236-2001	ohm	> 10 ⁹
Residual indentation	ISO24343-1:2007	mm	≤ 0.1
Determination of flexibility	ISO 24344:2008		No cracking
Color Fastness To Light	ISO 105-B02:2014		≥ 6
Effect of a castor chair	ISO 4918:2009		No visible damage
Curling	ISO 23999:2008	mm	> -0.52
Resistance to staining	ISO 26987:2008		Index 0: Not affected
Content of Pentachlorophenol (PCP)	EN 14041:2004		ND
Formaldehyde emission	EN 14041:2004		ND Class E1
Water-tightness	EN 14041:2004		No sign of penetrating water. PASS
Thermal resistance	EN 14041	(m ² ·k)/w	0.040
Thermal conductivity	EN 14041	W/(m·K)	0.057
SVHC	EN 14041:2004		< 0.1%
Sound insulation of building elements	ISO 10140-1:2010 ISO 717-2:1996	dB	15
Anti-bacterial and fungicidal			OK

Color Range



JHT-26201



JHT-26202



JHT-26203



JHT-26204



JHT-26205



JHT-26206



JHT-26207



JHT-26208



JHT-26209



JHT-26210



JHT-26101



JHT-26102




JHT-26103



JHT-26104



JHT-26105

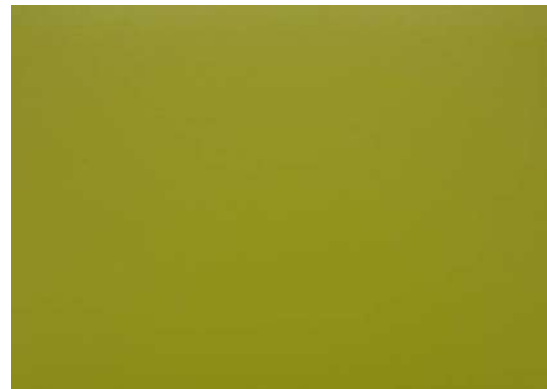

JHT-26106



JHT-26107



JHT-26108



JHT-26109



JHT-26110



JHT-26111



JHT-26112

The above pictures are just for references, please ask for samples before making final decision.
Please contact sales@jiahedecoration.com for more information.