



Loose Lay Floor

- Installation without glue, just lay it on any hard surface subfloor. It is the most installation mistake forgiving flooring.
- Excellent dimensional stability
- Excellent wear resistant
- Easy to remove and reuse in another space
- Easy maintenance
- Stain, slip and scratch resistance
- Recommend for: residential and commercial decoration, especially for OA floor decoration.

Specification			
Thickness	4.0~5.0mm		
Wear Layer	0.3~0.7mm		
Size Available	Plank: 9inx48.9in; Tile: 18inx24in (1in=25.4mm)		
Item	Standard	Unit	Result
Finish			UV
Abrasion	EN 660-2	mm ³	<1.7 Group T
Dimensional stability	EN 434 ASTM F2199	%	≤0.15%
Slip resistance	DIN 51130		R9
Curling	EN 434	mm	≤2
Peel strength	EN 431	N/50mm	Residential >38 Commercial >45
Flexibility	EN435		No Crack
Castor chair suitable	EN 425		suitable
Vertical resistance	EN 1081		$2.55 \times 10^{10} \Omega$
Color fasten to light	ISO105-B02	-	≥6
Color fasten to heat	ASTM F1514	-	No change
Stain resistance	EN 423	Class	0
Residual Indentation	EN433	-	≤0.1mm
Fire Behavior	EN ISO 9239-1		B _{FL} S ₁
VOC	CA Section 01350		Pass



Wood patterns:



JHW-1001



JHW-1002



JHW-1003



JHW-1004



JHW-1005



JHW-1006



JHW-1008



JHW-1009



JHW-1010



JHW-1012



JHW-1014



JHW-1015



JHW-1016



JHW-1017


Stone patterns:



JHS-2001



JHS-2002

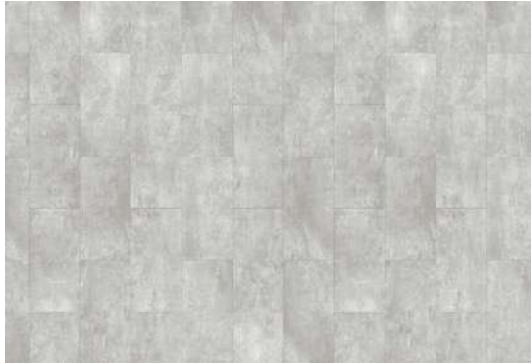

JHS-2003



JHS-2005



JHS-2006



JHS-2007



JHS-2008



JHS-2009



JHS-2010



JHS-2011



JHS-2012



JHS-2013



JHS-2014



JHS-2015



JHS-2016



JHS-2017

The above pictures are just for references, please ask for samples before making final decision.
Please go to www.jiahedecoration.com or contact sales@jiahedecoration.com for more information.